



PC120PR





PC200



PC350



PC450

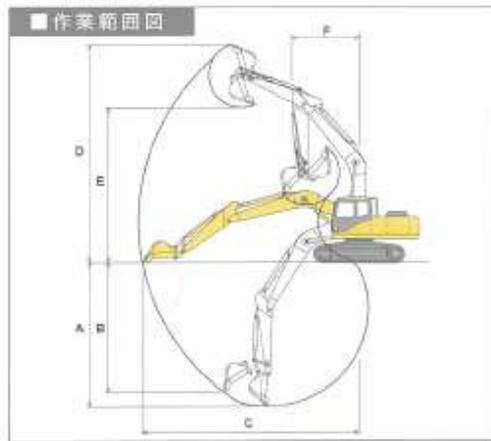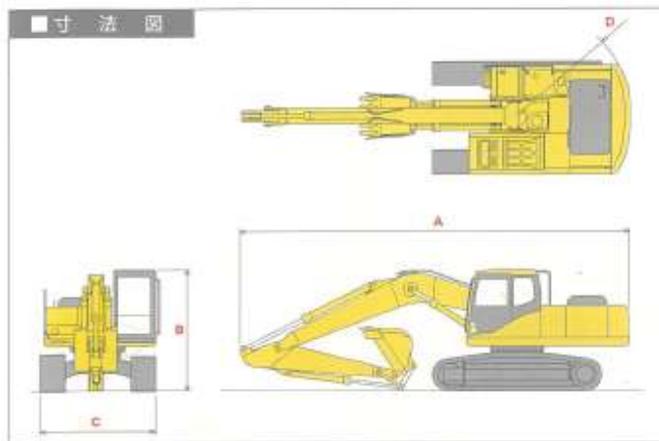

機械名		PC120PR	PC200	PC350	PC450
仕様					
機械質量	kg	12,400	19,800	33,800	45,100
メーカー		コマツ			
定格出力	kw	72.5	123	192	268
定格回転速度	min	2,050	2,000	1,950	1,900
総排気量	cc	3,260	6,690	8,850	11,040
バケット容量<新JIS>	m <sup>3</sup>	0.50	0.80	1.40	1.90
<旧JIS>	m <sup>3</sup>		0.7	1.2	1.70
バケット幅(サイドカッター含)	mm	860(980)	1,045(1,170)	1,460	1,625
作業範囲					
C.最大掘削深さ	mm	5,520	6,620	7,380	10,925
E.最大掘削半径	mm	8,290	9,875	11,100	12,005
B.最大ダンプ深さ	mm	6,210	7,110	7,050	7,625
A.最大掘削高さ	mm	8,650	10,000	10,100	10,925
D.最大垂直掘削深さ	mm	4,950	5,980	6,400	6,600
F.作業機最小旋回半径	mm	2,450	3,040	4,310	4,805
G.スイング時	mm	-			
最大床面掘削半径	mm	8,170	9,700	10,920	11,800
寸法					
A.全長	mm	7,620	9,505	11,145	12,040
B.全高(輸送時)	mm	2,875	3,135	3,285	3,660
C.全幅(輸送時/作業時)	mm	2,490	2,805	3,190	3,145/3,490
D.後端旋回半径	mm	2,210	2,830	3,445	3,645
排土板/ブレード幅×高さ	mm	-	-	-	-